



GLOSS SEALER

PREMIUM HI-GLOSS FINISH

SEAL-KRETE® GLOSS SEALER is a clear, urethane-fortified acrylic sealer developed to provide a high-gloss premium finish to painted, stained or bare concrete. It's durable, long-wearing, scratch-resistant, stain-resistant, oil and gas-resistant, and it extends paint life. GLOSS SEALER also protects against moisture damage and enhances the natural color of brick, slate, stone, exposed aggregate, saltillo, clay pavers, and stamped concrete.

Important: Read all directions thoroughly. Recommended: Wear gloves and safety glasses.

SURFACE PREP

Note: The surface should be clean and dry. You may need an oil stain remover such as SEAL-KRETE OSR® to lift stubborn oil stains. Power washing is recommended.

BARE CONCRETE: Concrete must have cured for a minimum of 30 days. Etch smooth-finished concrete (such as basement or garage floors) with a concrete etching solution like SEAL-KRETE Clean-N-Etch. **Note:** If etching with muratic acid the area must be neutralized before proceeding. For more information visit www.seal-krete.com.

PAINTED SURFACES: Freshly painted surfaces must have cured for a minimum of 72 hours. Paint must be sound (not blistering or peeling). Existing painted surfaces should be cleaned with a solution of TSP and water. Rinse well and allow to dry.

APPLICATION

Read "LIMITATIONS" section before use. This product is ready to use (do not dilute). Stir gently; do not shake. Apply in light, even coats. One coat is recommended; however, porous surfaces (like saltillo tile) require at least 2 coats. **Note:** Sealer goes on milky white but dries clear.

Roller: Dampen roller, remove excess water, then saturate roller with product. Keep a wet edge while rolling. Do not allow to puddle, foam or run. (Use a 1/4" nap for smooth surfaces, 3/8" nap for rough or porous surfaces.)

Pump Sprayer: Set at a fine spray and apply using a circular motion. To eliminate puddling or to achieve a more uniform finish, backroll immediately after spraying.

COVERAGE: 150-500 sq.ft. per gallon, depending on surface porosity.

DRY TIME: Dry to touch in 1 hour (77°F [25°C], 50% RH). Recoat in 2 hours. Dry to foot traffic in 24 hours. Will accept vehicular traffic in 72 hours. Dry times should be extended in colder climates.

CLEAN-UP & STORAGE: Clean tools with soap and water immediately after use. Store in a dry area. Do not allow product to freeze.

MAINTENANCE: Clean with a mild soap and water solution. Do not use solvent-based cleaners.

LIMITATIONS: Temperatures should be between 50°- 90°F (10°- 37°C) and should not fall below 50°F (0°C) within 24 hours of application. Do not apply if rain is expected within 12 hours. Do not use over water-based or solvent-based (oil-based) epoxy paints. Do not use on glazed tile. Do not use in areas subject to hydrostatic pressure. Smooth-finished concrete may be slippery when wet; consider using an anti-skid additive like SEAL-KRETE Clear Grip on high foot traffic areas.

CAUTION: EYE IRRITANT.

Contains Dipropylene Glycol N-Propyl Ether. Avoid contact with eyes and prolonged contact with skin. Do not ingest.

FIRST AID: In case of eye contact, flush with water for 15 minutes. If irritation persists, get medical attention. In case of skin contact, wash thoroughly with soap and water. If swallowed, drink 1-2 glasses of water and immediately contact medical services regarding any instructions to induce vomiting.

KEEP OUT OF REACH OF CHILDREN - DO NOT TAKE INTERNALLY.



Product	No.	Unit	UPC Code	Carton Bar Code	Carton Size (L x W x H)	Carton Size (cubic ft / lbs)	Carton Qty	Pallet Qty
Gloss Sealer	606001	1 gallon	0 15944 60601 0	1 00 15944 60601 7	14 x 14 x 8	.91 / 39	4	45



PROTECTIVE TOP-COAT For PAINTED, STAINED or BARE CONCRETE
DURABLE • NON-YELLOWING • SCRATCH & STAIN-RESISTANT

TECHNICAL INFORMATION

- Viscosity: 50 KU
- VOC < 250 g/l - EPA Method 24 - Waterproofing Sealer
- Clean-up: soap and water
- Shelf life: 2 years min. (closed container)
- Visual appearance: milky white (wet); glossy (dry)
- Gloss: 60
- Gloss retention: excellent
- Cleanability (occasional): excellent
- Tire marking: resistant to most tires
- Proprietary urethane-acrylic blend
- Water-based
- Low odor

ASTM TESTING (on smooth, bare, etched concrete)

- ASTM D-1475: pounds/gallon 8.57 ± .15
- ASTM E-70: pH 8.5-9.0
- ASTM D-2369-93: solids 25%
- ASTM D-1640: dry-to-touch 1-2 hours; dry to recoat 2-3 hours; dry to light foot traffic 24 hours; dry to vehicular traffic 72 hours
- ASTM D-3363 hardness: pencil F
- ASTM D-3359B intercoat adhesion: excellent
- ASTM G-53 ultraviolet resistance: excellent


CHEMICAL/SOLVENT RESISTANCE - ASTM D-1308

(One hour spot test)

- Water: resistant
- Gasoline: resistant
- Oil: resistant
- Salt: resistant
- Chlorine: resistant

LIMITED WARRANTY: Manufacturer/Seller makes no warranty of any kind except that this product is free from defect and is of merchantable quality. Buyer remedy for breach of warranty is limited to replacement of Seal-Krete product or refund of purchase price. Convenience Products will not be responsible for labor or the cost of labor for removal or application of any product.

TECHNICAL SUPPORT: For more information on surface prep or application guidelines, or to obtain a Material Safety Data Sheet, call 1-800-323-7357, M-F (8:00 am – 5:00 pm EST) or visit our website at www.seal-krete.com.

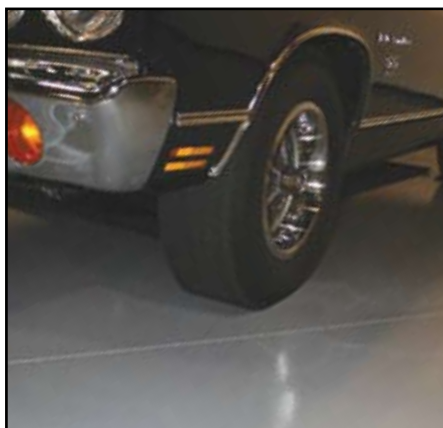

It's a great topcoat for painted surfaces. For increased traction on smooth concrete, try adding SEAL-KRETE Clear Grip™ anti-slip additive to Gloss Sealer before applying the final coat; a great idea for high foot-traffic areas.



SEAL-KRETE GLOSS SEALER protects against moisture damage and enhances the natural color of brick, slate, stone, saltillo, unglazed tile, clay/stone pavers, exposed aggregate and stamped concrete!

*Sanding or removing paint containing lead may be hazardous. For information contact the National Lead Information Center at 1-800-424-LEAD or www.epa.gov/lead.

**Convenience Products**

306 Gandy Rd., Auburndale, FL 33823 USA
Questions or comments? e-mail: tech@seal-krete.com
 or call 1-800-323-7357

How to treat concrete®www.seal-krete.com