



DAMPLOCK

FAST-SETTING HYDRAULIC CEMENT

SEAL-KRETE® DAMPLOCK™ Fast-Setting Hydraulic Cement is formulated to immediately stop active water leaks in all types of concrete and masonry. It helps reduce radon gas penetration from groundwater and is suitable for interior / exterior, above or below grade applications. This cement is ready to topcoat with DAMPLOCK Concrete Waterproofing Paint in about 4 hours. Important: Read all directions thoroughly. Always wear gloves and eye protection.

APPLICATION

PREPARE: The surface to be repaired should be clean, sound and free of dirt, dust, oil, wax, grease and mildew. Use a wire brush to remove loose material. See diagram at right for preparing floor and foundation cracks/holes for repair. Dampen crack/hole with water, and keep damp to activate patch material.

MIX: In a separate container, add 3 parts cement to 1 part room temperature water to achieve a putty like consistency. *NOTE: Cement sets very quickly, so only mix enough that can be placed in 1 minute. Incorrect water/cement ratio, or varying water and climate temperature can shorten or lengthen set time.*

REPAIR: After preparing the hole/crack and mixing the cement, force cement into the hole to be sealed. Trowel in place until set. Done correctly, the cement patch will dry quickly and immediately stop active water leaks.

SPECIALTY APPLICATIONS

HYDROSTATIC PRESSURE – drill a hole in concrete to relieve external water pressure, then repair the drilled hole as specified above.

ANCHORING BOLTS OR METAL – drill a hole at least one inch larger than the bolt or metal to be anchored. Prepare surface and mix cement. Push cement into hole and quickly place bolt/metal into the cement patch. Trowel into place as needed.

Visit www.seal-krete.com for additional specialty application instructions.

CAUTION: KEEP OUT OF REACH OF CHILDREN. Use only with adequate ventilation. Do not breathe dust. Open windows and doors or use other means to ensure fresh air entry during application and drying. Avoid eye contact and prolonged contact with skin. Avoid exposure to dust by wearing an appropriate (NIOSH approved) particulate respirator during mixing and sanding. Follow respirator manufacturer's directions for use. Close container after each use. Avoid contact with eyes, skin and clothing. Wash skin thoroughly after contact/handling.


WARNING! Contains Crystalline Silica, which can cause cancer. Risk of cancer depends on duration and level of exposure to dust generated from sanding surfaces or spray mists. This product contains a chemical known to the State of California to cause cancer. If spilled, contain material and dispose of container and unused contents in accordance with local, state and federal regulations.

FIRST AID: Eye Contact: Flush thoroughly with water for at least 15 minutes. Get immediate medical attention. **If Inhaled:** If affected by vapors, move to fresh air. If breathing difficulty continues, get medical attention immediately. **If Swallowed:** Contact the poison control center at 1-800-222-1222.

TECHNICAL SUPPORT: For assistance call 1-800-323-7357 (M-F, 8am-5pm EST) or visit www.seal-krete.com.

WARRANTY: Manufacturer/seller makes no warranty of any kind except that this product is free from defect and is of merchantable quality. Buyer remedy for breach of warranty is limited to replacement of product or refund of purchase price.

WARNING! If you scrape, sand or remove old paint, you may release lead dust. LEAD IS TOXIC. EXPOSURE TO LEAD DUST CAN CAUSE SERIOUS ILLNESS SUCH AS BRAIN DAMAGE, ESPECIALLY IN CHILDREN. PREGNANT WOMEN SHOULD AVOID EXPOSURE. Wear a NIOSH-approved respirator to control lead exposure. Clean up carefully with a HEPA vacuum and a wet mop. Before you start, find out how to protect yourself and your family by contacting the National Lead Information Hotline at 1-800-424-LEAD or log onto www.epa.gov/lead.

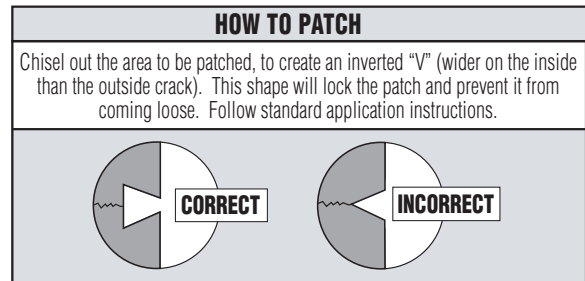

| PRODUCT NO. | DESCRIPTION | UNIT SIZE | UPC CODE | CARTON QTY. | CARTON BAR CODE | CARTON SIZE (L x W x H) | CARTON CUBIC FT. | CARTON WT. (LBS) | CARTONS / PALLET |
|-------------|------------------|-----------|-----------------|-------------|--------------------|-------------------------|------------------|------------------|------------------|
| 850032 | HYDRAULIC CEMENT | 3 LBS. | 0 15944 85032 1 | 6 | 9 00 15944 85032 4 | 13.5 x 9.25 x 5.5 | .40 | 20 | 90 CASES |



IMMEDIATELY STOPS ACTIVE WATER LEAKS

Sets in Under 3 Minutes • Helps Reduce Radon Gas Penetration • Interior/Exterior, Above/Below Grade Use